



CHIUAN-YEOU INDUSTRIAL CO., LTD


全友工業股份有限公司

Stable & Perfect Performance

Best Quality & Produce Capacity



ISO 9001:2015

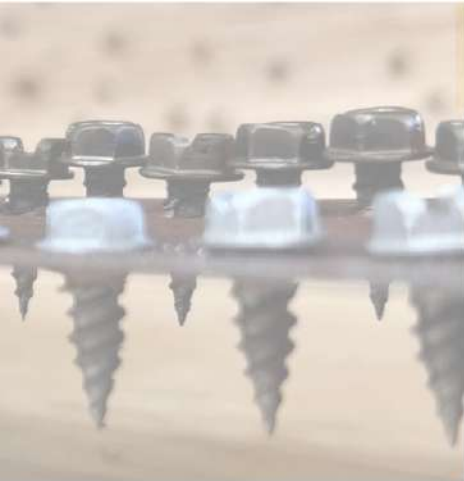

IHWH Tapping Screw



Axial load : 30 kg

Plate thickness : 1.25mm X2

Drilling Time : 1.6 sec or less



IHWH Slot ZINC FLAKE Tapping Screw



SST 500 HR MIN

Axial load : 15 kg

Plate thickness : 1.0mm

Drilling Time : 1.0 sec or less





ISO 9001:2015



Momentum Screw with Spiral Thread Design

With spiral thread design to create drilling effect on wood material with less friction, generate more penetration force to shorten working hours and saving electricity power.

MATERIAL

Carbon steel & Stainless steel

MAIN SPEC



M3.0-M6.0 (#5-#14) , 40-150 mm (1-5/8"-6")

TRAITS

- ✓ Edge Crack-Proof with Designed thread
- ✓ Faster, More Stable, More Efficient
- ✓ Saving Human Power and Electricity Power



Special thread that there are two different designed thread type on each screw.

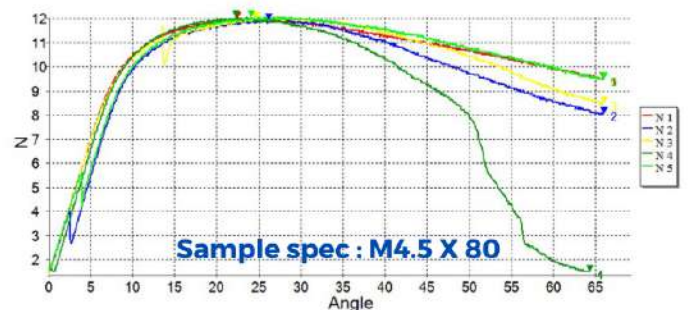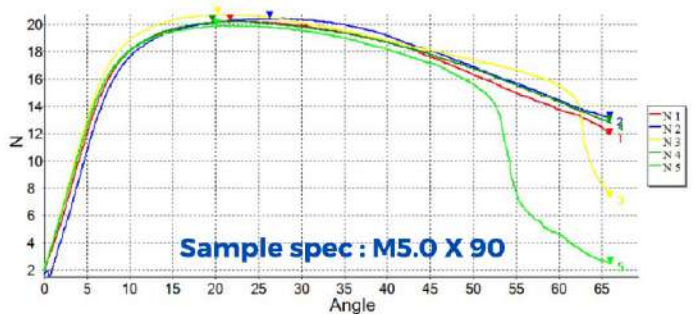

We also process the bending angle test, each sample size is M4.5x80 and M5.0x90. As the test result show on the left, our designed thread screw shows the perfect bending test.